

# Bicycle Owner's Manual



Even if you have ridden a bike for years, it is important for **EVERY** person to read Chapter 1 before you ride your new bicycle.



**TREK**

# IMPORTANT: KEEP FOR FUTURE REFERENCE

## About this Owner's Manual

This manual explains how to ride your new bike safely.

**Even if you have ridden a bicycle for years, it is important for EVERY person to read Chapter 1 before riding this bicycle!**

Parents should explain Chapter 1 to a child or anyone else who might not otherwise understand this information.

This manual also shows how to perform basic maintenance. Some maintenance should only be performed by your dealer, and the manual indicates these tasks. If you choose to perform these tasks, you should purchase a detailed repair manual from your dealer.

This manual includes a CD (compact disc) with more comprehensive information. This CD can be viewed by inserting it into your home computer. If you do not have a computer, take the CD to your school, work, or public library and view it there.

If your CD does not work, go to the web address on the cover to access the information on the web.

## Meaning of special symbols and lettering

### **WARNING**

In this manual, the **WARNING** sign indicates a hazardous situation which, if not avoided, could result in death or serious injury.

### **CAUTION**

In this manual, the **CAUTION** sign indicates a hazardous situation which, if not avoided, may result in minor or moderate injury.

## Register your bicycle

Bicycle registration is the only record we have of who owns this bike. If there is ever a need to communicate with the owner, such as providing updated safety information, your registration is crucial. There are two easy ways to register your new bicycle:

- Click the Registration link when viewing the CD supplied with this manual
- Go to the web address on the back cover of this manual and follow the links.

The web site also provides a link to updated safety information. If you choose not to register, make sure you check the web site often.

Keep for your records

My bicycle model:

My serial number:

Lock key #

My dealer:

My dealer's phone:

## **Assembly of your new bicycle**

Assembly and the first adjustment of your bicycle take special tools and skills, so this should only be done by an authorized dealer.

## **If you have questions**

There are many models, with a variety of equipment, so this manual may contain some information that does not apply to your bike. Some illustrations may vary from the actual bicycles.

If you have any questions after reading the information in this manual, consult your dealer. If you have a question or problem that your dealer can't handle, contact us:

Attn: Customer Service  
801 W. Madison Street  
Waterloo, Wisconsin 53594  
920.478.4678

This manual conforms with these standards:

ANSI Z535.4  
CPSC CFR 1512  
BS 6102 : Part 1: 1992  
CEN 14764, 14765, 14766, 14872

# TABLE OF CONTENTS

## Chapter 1- Guide to Safe On-and-Off Road Operation

### Bicycle type and use classification

Child bike .....	1
Condition 1.....	1
Condition 2.....	1
Condition 3.....	2
Condition 4.....	2
Condition 5.....	2

### Before a first ride

Make sure the bicycle fits .....	3
Know how the bicycle performs	3

### Check the bike before every ride

Before every ride checklist .....	4
Carbon fiber inspection.....	7

### Rules for safe riding

Know and observe local bicycle riding laws .....	9
Watch for cars, pedestrians, and other obstacles .....	9
Wear a helmet and proper cycling clothes .....	9
Change your riding to be safe in variable conditions.....	9

### Riding instructions

Use your brakes carefully .....	12
Use good shifting techniques .	12

### Take care of your bike

Protect your bike when parking or storing it .....	13
Carry repair items.....	14
Only install and use approved accessories .....	14
Keep the bike clean .....	14
Avoid clamping the frame during transportation or repair .....	14
Protect your bicycle during shipping .....	14

## Chapter 2: Maintenance

Maintenance schedule.....	15
Recommended tools for proper bicycle maintenance.....	16

## Chapter 3: Adjustment 17

Handlebar .....	17
Stem .....	17
Bar-ends .....	19
Saddle .....	19
Headset.....	21
Crankset .....	21
Crank arms .....	21
Pedals .....	21
Bottom bracket.....	21
Chain .....	21
Cables .....	22
Shifters.....	22
Front derailleur.....	22
Rear derailleur .....	23
Nexus 4, 7, or 8 speed systems	24
3 speed systems .....	24
Brake levers .....	25
Brakes .....	27
Wheels .....	29
Suspension components.....	31
Accessories .....	31
Folding bike .....	32
Stem .....	33
Seatpost.....	33
Bottom bracket.....	33
Pedals .....	33

## Chapter 4: Lubrication

Derailleurs.....	34
Headset.....	34
Brakes and brake levers.....	34
Wheels .....	34
Suspension forks.....	34
Rear suspension.....	34
Control cables .....	34

For more information.....	35
Limited warranty .....	36

# BICYCLE TYPE AND USE CLASSIFICATION

Riding a bicycle in a manner beyond, or more severe than, its intended use can cause the bicycle or part of the bicycle to fail. The following information explains the type of riding intended for different types of bikes. Read the safety information in Chapter 1 for further details.

## **⚠ WARNING**

**Bicycles, or their parts, can be broken or damaged by riding in a manner more stressful than the intended use of the bike. If the bike is damaged, you could lose control and fall. Do not ride beyond the design limits of the bike. If you are unsure of the limits of the bike, consult your dealer.**

### **Child bike**

These bikes are designed for children riding where parental supervision is always required. Riders shall avoid areas used by automobiles, as well as inclines, curbs, stairs, or areas near drop-offs or pools.



### **Child bike types**

- Maximum seat height of 680 mm; generally, bicycles with 16" or 20" wheels, and kids' tricycles
- No quick-release wheel fastening systems
- Weight limit: 80 lbs (36 kg)

### **Condition 1**

Bikes designed for riding on a paved surface where the tires do not lose ground contact.




### **Condition 1 bike types**

- Drop-type handlebars including touring bikes, but not cyclocross bikes
- Triathlon, time trial, or speed bikes
- Tandems of any design
- Cruisers with wide, 26" tires and swept-back handlebar
- Any bike that folds
- Weight limit: 275 lbs (125 kg); Tandems: 550 lb (250 kg)

### **Condition 2**

Bikes designed for riding Condition 1, plus smooth gravel roads and improved trails with moderate grades where the tires do not lose ground contact.



### **Condition 2 bike types**

- Hybrid bikes with 700c wheels, tires wider than 28c, and flat handlebars
- City bikes- specially-equipped hybrids
- Cyclocross bikes- with drop-type handlebars, knobby 700c tires, and cantilever or disc brakes
- Weight limit: 300 lbs (136 kg)


### Condition 3

Bikes designed for riding Conditions 1 and 2, plus rough trails, small obstacles, and smooth technical areas, including areas where momentary loss of tire contact with the ground may occur. NOT jumping.

All mountain bikes without rear suspension are Condition 3, and so are some light-weight rear suspension models.

#### Condition 3 bike types

- "Standard" or "cross-country" mountain bikes with wide, knobby 24, 26, or 29" tires
- May include short-travel rear suspension (3"/75 mm or less)
- Weight limit: 300 lbs (136 kg)




### Condition 5

Bikes designed for jumping, hucking, high speeds, or aggressive riding on rougher surfaces, or landing on flat surfaces.

However, this type of riding is extremely hazardous and puts unpredictable forces on a bicycle which may overload the frame, fork, or parts. If you choose to ride in Condition 5 terrain, you should take appropriate safety precautions such as more frequent bike inspections and replacement of equipment. You should also wear comprehensive safety equipment such as a full-face helmet, pads, and body armor.

#### Condition 5 bike types

- "Freeride" or "jumping" bikes with heavy-duty frames, forks, and components
- Weight limit: 300 lbs (136 kg)



### Condition 4

Bikes designed for riding Conditions 1, 2, and 3, plus rough technical areas, moderately sized obstacles, and small jumps.

#### Condition 4 bike types

- "Heavy-duty" or "all-mountain" mountain bikes with wide, knobby 24, 26, or 29" tires
- May include medium-travel rear suspension (4"/100 mm or more)
- Weight limit: 300 lbs (136 kg)



# BEFORE A FIRST RIDE

## Make sure the bicycle fits

Your dealer should fit you with the proper size of bicycle.

There should be at least 1" (25 mm) clearance between the top tube and the rider when standing over the bicycle (Figure 1). For mountain bikes, 2-3" (50-75 mm) clearance is recommended.

The seat and handlebar may be adjusted to offer the best comfort and performance. Before making these adjustments, refer to Chapter 3.



Figure 1- Minimum stand-over height  
A = 1" (25 mm) for most bicycles  
2-3" (50-75 mm) for mountain bicycles

## Know how the bicycle performs

The features of your bicycle, if misused, may cause you to lose control of the bike. Before riding fast or in more difficult conditions, learn the function and performance of all the mechanisms of your bike by riding at slower speeds in a flat, empty parking lot.

If you want your bicycle to perform differently, or if you have special needs that require different parts for the safe operation of your bike, consult your dealer.

## Learn the power of your brakes

The stopping power on bikes varies according to the intended use of the bike. If you would like your bike to have more, or less, stopping power, consult your dealer about brake adjustments or other brake options for your bicycle.

### **⚠ WARNING**

**Mis-use of the braking system, including over-use of the front brake, can cause you to lose control and fall. Avoid improper braking by understanding and practicing proper application of your brakes as explained in this manual.**

## Avoid toe-clip overlap

When riding slowly, do not pedal if the handlebar is turned. It may be possible, at very slow speeds, when the handlebar is turned, for your foot or toe-clips to contact the front wheel or fender (Figure 2). At normal riding speeds, the handlebar does not turn enough for this to occur.




Figure 2- Toe-clip overlap

### **⚠ WARNING**

**Contact between your foot or toe-clip and the front wheel or fender can cause you to lose control and fall. Avoid pedaling when turning at slow speed.**

# CHECK THE BIKE BEFORE EVERY RIDE

## Stop riding if you have frame problems

Occasionally riders experience problems with their frame or fork. If a frame or fork has any problem, do not ride the bicycle.

As an example, in very rare cases, some riders may experience a “shimmy” or “harmonic oscillation” or “frame vibration” at certain speeds. If you are experiencing a shimmy, slow down immediately. Take your bicycle directly to a dealer for inspection and repair.

### **WARNING**

**A shimmy, or steering wobble, can cause you to lose control and fall. If you experience a shimmy, slow down immediately. Take your bicycle to your dealer for inspection and repair.**

Before every ride, inspect the bike with the following check list. If any part of the bicycle fails the inspection, repair the bicycle by following the information provided by this manual, or take the bike to your dealer for service. Never ride a bike with a damaged part; have it replaced.

*This is not a comprehensive maintenance program.*

## Before every ride checklist

- Wheels**
- Tire inflation**
- Brakes**
- Handlebar and stem**
- Seat and seatpost**
- Suspension adjustments**
- Lights and reflectors**
- Frame, fork, and components**

### **CAUTION**

**A bicycle that does not work properly can cause you to lose control and fall. Inspect the entire bicycle thoroughly before every ride, and do not ride it until any problem has been corrected**

#### **Check the wheels**

**Check that the wheels are straight.** Spin each wheel and watch the rim as it passes through the brake pads or the frame. If the rim wobbles up and down or from side to side, repair the wheel.

**Check that the wheels are properly attached.** Bicycle wheels are attached by several systems: threaded axle nuts, a quick-release where a lever-actuated wheel retention mechanism

(Figure 3) allows the wheel to be installed and removed without tools, or a thru-axle where the axle is threaded through the ends of the frame or fork. For information about adjustment and closure of the wheel attachment devices on your bicycle, see Chapter 3.



Figure 3- Wheel quick-release



Figure 4- Test for looseness

Test for proper wheel attachment. Pick up the bike and sharply hit the top of the tire (Figure 4). The wheel must not come off, be loose, or move from side to side. Further tests are provided in Chapter 3.

**⚠ WARNING**  
**A wheel attachment device that is not properly adjusted and closed may allow the wheel to be loose or come off unexpectedly, causing you to lose control and fall. Make sure the wheels are properly attached before riding the bike.**

**✓ Check the tire inflation**

Inflate the tires to the air pressure recommended on the tire sidewalls.

**✓ Check the brakes**

Follow the inspection instructions for the type of brake on your bike:

**Hand-rim brake-** a hand lever connected to the brake by a cable

**⚠ WARNING**  
**Never ride a bike if you are not certain the brakes are working properly, or you if suspect a problem with the brake cables or hydraulic hose. Malfunctioning brakes can cause you to lose control and fall. Inspect the brakes thoroughly before every ride. If your brakes are not working properly, re-adjust them or take the bike to your dealer for service.**

causes the brake pads to squeeze the rim. When the brakes are not applied, the brake pads should be 1 to 2 mm from the rim.

Squeeze each brake lever toward the handlebar to make sure the brake moves freely and stops the bike. If the brake lever can be pulled to the handlebar, the brake is too loose. If the brake pads are too close to the rim, the brake is too tight. Brake pads should be aligned with the rim surface (Figure 5).

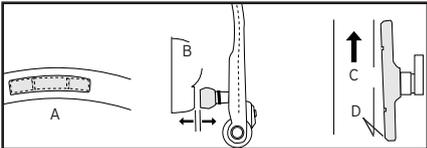


Figure 5- Brake pad alignment  
 A- Brake pad aligned with rim surface  
 B- Pad and rim should be parallel  
 C- Direction of rim rotation  
 D- 0.5-1.0 mm toe-in

**Disc brake-** a hand lever connected to the brake by a cable or hydraulic hose squeezes a disc mounted on the wheel hub.

Squeeze each brake lever toward the handlebar to make sure the brake moves freely and stops

## **⚠ CAUTION**

**Disc brakes and discs get very hot during use and could burn skin. Also, the disc edges may be sharp and could cut skin. Avoid touching the disc or disc brake when hot, or when rotating.**

the bike. If the brake lever can be pulled to the handlebar, the brake is too loose. The brake pads should be 0.25-0.75 mm away from the disc when the brakes are not applied. If the pads are too close, the brake is too tight, or mis-aligned.

**Internal hub brake-** a hand lever connected to the brake by a cable activates a mechanism inside the hub.

## **⚠ CAUTION**

**Internal hub brakes get very hot during use and could burn skin. Avoid touching the hub or cooling fins when hot.**

If it takes more than 5/8" (15 mm) of brake lever movement to stop the bike, the brake is too loose. If it takes less than 7 mm of lever movement to stop the bike, the brakes are too tight.

**Coaster brake-** the brake is engaged by pedaling backwards. When pedaling backwards, the brake should engage with less than 60 degrees rotation (1/6 revolution).



Figure 6- Checking chain tension

The chain actuates the brake, so make sure the chain cannot come off. There should be between 1/4-1/2" (6-12 mm) total vertical movement of the chain (Figure 6).

### **✓ Check the handlebar and stem**

Make sure the stem is in alignment with the front wheel. Test the stem connection to the fork by attempting to turn the handlebar from side to side with the front wheel locked between your knees (Figure 7).

Test the security of the handlebar by attempting to rotate it in the stem. It should not move or be loose. Make sure that no cables are stretched or pinched by rotating the handlebar.

Check that the handlebar plugs are properly inserted into both ends of the handlebar (and bar-ends).

### **✓ Check the seat and seatpost**

Make sure the seat is secure by attempting to turn the seat and seatpost in the frame, and attempt to move the front of the seat up and down. It should not move or be loose.



Figure 7- Function testing the handlebar and stem

### ✔ Check the suspension adjustments

Make sure your suspension components are adjusted to your riding style, and that no suspension component can "bottom-out" or be so compressed that there is no further suspension travel or movement remaining.

### ✔ Check the lights and reflectors

Make sure the lights are functioning correctly and that any batteries are charged. If the lights use a dynamo, make sure it is mounted correctly and all attachment hardware is tight. Make sure reflectors are clean and in position.

### ✔ Check frame, fork, and components

Carefully inspect your frame, fork, and components for signs of fatigue before and after each ride. Regularly inspect your entire bicycle for signs of fatigue stress:

- Dents
- Cracks
- Scratches
- Deformation
- Discoloration
- Unusual noises

Even if you perform regular inspections, if you exceed the limit of strength of your bicycle or a given part, it may fail if overloaded. After any high force load, thoroughly inspect all the parts of your bike. High force loads include crashes, but you don't have to crash to put a high force load on your bike. For example, hitting a

large hole in the road or a sharp bump such as a railroad track can put large forces on your bike.

The manner in which you ride will determine whether your bike and its parts will last. If you ride hard or aggressively, you should replace the bike and/or its parts more often than riders who ride smoothly or cautiously. There are many variables: weight, speed, technique, terrain, maintenance, riding environment (humidity, salinity, temperature, etc.), and the frame or part itself- so it is impossible to give a precise timetable for replacement. If you aren't sure, ask your dealer. But as a rule, it is better to err on the safe side and replace the bike or parts more frequently.

### Carbon fiber inspection procedures

Carbon fiber is among the strongest materials used in bicycle manufacture. However, carbon has unique qualities, different from metal parts, and must be inspected carefully for damage.

Unlike metal parts, carbon composite parts that have been damaged may not bend, bulge,

#### **WARNING**

**A damaged carbon fiber part can fail suddenly. Inspect your carbon fiber bicycle or parts for damage frequently. If you have crashed or impacted your bicycle, or suspect a carbon part is damaged, IMMEDIATELY STOP RIDING YOUR BICYCLE. Take it to your dealer for inspection, service, and evaluation under the crash replacement policy.**

or deform; a damaged part may appear to be normal to a cursory glance. If you have any doubts about the integrity of a part, do not ride the bicycle.

Be very careful when handling carbon fiber parts that are suspected of damage. When a composite part is damaged, there is a possibility that individual fibers may be exposed. Carbon fibers are thinner than a human hair, but quite stiff. If the point of one of these fibers is pressed against your skin, it could pierce your skin like a needle.

### **Inspecting carbon fiber composite frame, fork, or parts**

Use the following procedures to inspect carbon composite parts:

- Check for scratches, gouges, or other surface problems.
- Check the part for loss of rigidity.
- Check the part for delamination.
- Listen for unusual creaking or clicking noises.

*These tests may not be conclusive.*

The tests are difficult to describe, so we provide a movie of inspecting a composite part on the owner's manual CD and on the owner's manual web site.

### **To check a part for surface problems (visual test)**

1. Clean the part thoroughly with a damp cloth.
2. Look closely for problems:
  - scratches

- gouges
- cracks
- loose fibers (which will appear like thin hairs)
- other surface flaws

### **To check a part for loss of rigidity (flex test)**

Use the part in a normal manner (without actually riding) while someone watches carefully for unexpected movement.

As an example, if you suspect a composite seatpost has been damaged, sit gently on the saddle while someone watches to see if the seatpost flexes.

### **To check a part for delamination (tap test)**

1. Clean the part thoroughly with a damp cloth.
2. With a coin, tap the part near any possible damage and places where the part is known to be in good condition (or use a similar part).
3. Listen carefully for variations in sound, especially a hollow sound, "dead" tone, or any sound indicating that the part is not solid.

# RULES FOR SAFE RIDING

## Know and observe local bicycle riding laws

Most state and local areas have specific laws for cyclists, and you should follow them. Local cycling clubs or your state's Department of Transportation (or equivalent) should be able to supply this information to you. The requirements for items such as lights and reflectors change between areas, so check ahead.

These are a few of the more important rules of riding:

- Use proper hand signals.
- Ride single file when riding with other cyclists.
- Ride on the correct side of the road; never go against traffic.
- Ride defensively; expect the unexpected. A cyclist is hard to see, and many drivers simply are not trained to recognize the rights and special considerations of a bicycle rider.

## Watch for cars, pedestrians, and other obstacles

Watch for and avoid potholes, drain grates, soft or low shoulders, and other deviations which could impact your wheels or cause them to slip. When crossing railroad tracks or drain grates, do so carefully at a 90° angle (Figure 8). If you are not sure of riding surface conditions, walk your bike.




Figure 8 - Angle for crossing tracks

If a car suddenly enters your lane, or someone unexpectedly opens the door of a parked car, you could be involved in a serious accident. Mount a horn or bell on your bicycle, and use it to alert others of your approach.

## Wear a helmet and proper cycling clothes

Wear a helmet that meets CPSC or CE safety testing standards (Figure 9); it may help prevent injury.



Figure 9 - Wear a bicycle helmet

Helmets should be removed when not riding the bicycle. If the helmet is caught, stuck on, or stuck between objects, the wearer could choke.

Wear protective clothing including helmet, eye protection, and gloves. Avoid loose-fitting pants that could get caught in the chain.

Also wear light, bright, and reflective clothing to make yourself more visible, especially at night.

## Change your riding to be safe in variable conditions

### Ride carefully in wet weather

No brakes, whatever their design, work as effectively in wet weather as they do in dry. Even properly aligned, lubricated, and maintained brakes require greater lever pressure and longer

stopping distances in wet weather. Anticipate the extra distance it will take to stop.

Wet weather causes reduced traction. Use slower cornering when traction is reduced, such as when riding over wet leaves, painted crosswalks, or manhole covers.

When wet weather cools to below freezing, traction is reduced even further. In addition, brakes may not work as well. Adjust your riding speed accordingly, or use other forms of transportation.

When riding in wet weather, a dynamo (generator light) may not work properly. Avoid riding in wet weather when visibility is reduced.

Strong winds can make a bicycle steer or turn unexpectedly. In windy conditions, slow down or use other forms of transportation.

### **Be careful when riding in low light conditions.**

Your bicycle is equipped with a full set of reflectors; keep them clean and in position. As useful as these reflectors are, they do not help you see, nor do they help you be seen unless light is directed on them. Use a working headlight and

taillight when you ride in poorly lighted or low visibility conditions. The important thing is to see and be seen. If you do any amount of riding at dusk, at night, or in any poorly lighted conditions, consult your dealer to find appropriate products to aid your vision and make you more visible.

### **Do not use unsafe riding practices**

Many cycling accidents could be avoided by using common sense. Here are a few examples:

- Do not ride 'no hands'.
- Do not ride with loose objects attached to the handlebar or any other part of the bicycle.
- Do not ride while intoxicated or while using medications which might make you drowsy.
- Do not 'ride double'.

*continued next page*

### **⚠ WARNING**

**A bicycle rider without proper lighting and reflectors may not have good vision and may not be visible to others. Use front and rear bicycle lights and reflectors when riding in poor visibility conditions. Failure to do so will increase your chances of being involved in an accident in low light conditions.**

### **⚠ WARNING**

**The following riding practices increase your risk of injury:**

- Jumping your bicycle
- Performing bicycle stunts
- Severe off-road riding
- Downhill riding
- Any abnormal bike riding

**Each of these practices increases the stress on every part of your bicycle. Frames or parts under high stress may fatigue prematurely, causing them to fail and increasing the risk of injury to the rider. To decrease your risk of injury, avoid these riding practices.**

- Use special care when off-road riding. Ride only on the trails. Avoid rocks, branches, or depressions. When approaching a descent, reduce speed, keep your weight back and low, and use the rear brake more than the front.
- Do not ride in an abusive manner; ride within the Use Classification for your type of bicycle (see pages 1-2).

Bicycles are not indestructible. As with anything mechanical, every part of a bicycle has a limited useful life due to wear, stress, and fatigue. Fatigue refers to a low-stress force that, when repeated over a large number of cycles, can cause a material to fail or break. The length of the life of a part varies according to its design, materials, use, and maintenance. Although lighter frames or parts may, in some cases, have a longer life than heavier ones, it should be expected that light-weight, high-performance bicycles and parts require better care and more frequent inspections.

### **Avoid riding too fast**

Higher speeds create higher risks and greater forces in the event of a crash. At higher speeds, it is more likely that wheels will

slip, or that a small bump can create a significant impact to your frame or fork. Keep your bicycle under control at all times. For children, the limit of speed for safe riding is much lower, so parents should strictly enforce this rule.

## **⚠ WARNING**

**Training wheels prevent the normal inward lean of a bicycle during a turn. If the bicycle is turned too quickly, the bike may tip over, resulting in an accident. With training wheels, do not ride fast or turn sharply.**

## Use your brakes carefully

Always keep a safe stopping distance between you and other vehicles or objects. Adjust stopping distances and braking forces to suit riding conditions.

If your bike has two hand brakes, apply both brakes at the same time. Over-use, or mis-use, of a front-wheel brake, such as using only the front-wheel brake in an emergency, could cause the rear wheel to lift from the ground which could cause you to lose control (Figure 10).




Figure 10- Overuse of the front-wheel brake

Bicycles are normally manufactured with the left brake lever controlling the front-wheel brake. To change so that the right lever controls the front-wheel brake, see Chapter 3.

Many models of modern brakes are very powerful; they are designed to stop a bike in wet or muddy conditions. If you feel your brakes are too powerful for your riding needs, take your bike to your dealer

## **⚠ WARNING**

**Applying sudden or excessive stopping force with the front-wheel brake may cause the rear wheel to lift off the ground, or the front wheel to slip out from under you, which can cause you to lose control and fall. Apply both brakes at the same time, and shift your weight backwards on the bike while braking.**

for adjustment or replacement of the braking system.

## Use good shifting techniques

Shifting gears allows you to choose the gear combination most comfortable for riding conditions, one that allows you to maintain a constant rate of pedaling. Shifting systems are of two types: derailleur (external) and internal.

### Shifting a bike with a derailleur

The left-hand shifter controls the front derailleur and the right-hand shifter controls the rear derailleur. Use only one shifter at a time. Shift gears only when the pedals and chain are moving forward. When you shift, reduce the force on the pedals to provide quicker and smoother shifting, to help avoid excessive chain and gear wear, and to help avoid bent chains, derailleurs, and chainrings. Avoid shifting when going over bumps; the chain may not shift properly or may fall off.

With modern indexed shifting systems, a movement of the shifter from one position to the next (or movement of the shifter to the "shift" position) should promptly move the chain from one gear to the next. However, bikes equipped STI road shifters and triple chainrings may shift better, particularly when shifting from the smallest chainring to the middle, if you "hold" the lever for a moment before letting go of the shifter.

### Shifting a bike with internal gearing

Shifting with internal gearing

# TAKE CARE OF YOUR BIKE

is best performed when coasting, stopped, or back pedaling. If you must shift while pedaling, reduce your pressure on the pedals.

Excessive chain tension makes shifting difficult.

## Protect your bike when parking or storing it

### Protect your bike from theft

Purchase and use a lock that is effective against bolt cutters and saws. Never leave your bike unlocked while unattended.

### Record and keep your serial number

Register your bicycle with your local police department. Complete our on-line warranty registration; we will keep the serial number of your bike on file. Also, write the serial number in the front of this manual, and keep the manual in a safe place.

### Park your bike safely

When not riding, keep your bike in a place where it will be out of the way, and make sure it cannot fall over. Do not lay the bike on its derailleurs, as you may bend the rear derailleur or get dirt on the drivetrain. Don't let the bike fall down, as this may cut the handlebar grips, or tear the seat. Incorrect use of bike racks may bend your wheels.

### Store your bike carefully

When not riding, keep your bike where it will be protected from rain, snow, sun, etc. Do not store the bike near electric motors, as ozone from motors destroys rubber and paint. Rain or snow may cause the metal on your bicycle to corrode. Ultraviolet radiation from the sun may fade the paint, or crack any rubber or plastic on the bicycle.

Before storing your bike for an extended period of time, clean and lubricate it, and polish the frame with frame polish. Hang the bicycle off the ground with the tires at approximately half pressure. Before riding the bicycle again, be certain it is in good working order.

### Carry repair items

Carry a pump, spare inner tube, patch kit, and appropriate tools to keep your bicycle running in the case of a flat tire or other common mechanical problem. If you ride at night, carry spare bulbs and batteries for your lights.

### Only install and use approved accessories

Not all accessories are compatible or safe, so only add accessories that are approved by the manufacturer. As an example, a child carrier places weight high on the bike, affecting the stability of the vehicle. Although most of our bikes can be fitted with a child carrier,

## WARNING

**Never modify your frameset or parts in any way, including sanding, drilling, filing, removing redundant retention devices, installing incompatible forks, or by any other method. Improper components or improper assembly can place unknown stress on your bike or components. An improperly modified frame, fork, or component can cause you to lose control and fall. Before adding or changing any part of your bike, consult your dealer.**

the rider must use extra caution to compensate for the decreased stability.

The list of incompatible parts is too long for this manual. If you are unsure whether a part is approved, consult your dealer.

### Keep the bike clean

If your frame or a component is dirty, clean it with a soft, damp cloth and bike cleaner or a solution of dish soap and water. Use of industrial solvents or harsh chemicals for cleaning may damage the paint.

### Avoid clamping the frame during transportation or repair

Never clamp the bike frame by its finished or painted surfaces. This type of clamp this may damage the paint or even dent, crush, or break the light-weight tubing used in high-performance bicycle frames.

## NOTICE

Clamping devices used by work stands and car carriers can damage the finish on a bike or even crush the tubing. When putting a bike in a repair stand, clamp the seatpost. When carrying a bike in a car carrier, clamp the wheels and the fork tips.

### Protect your bicycle during shipping

If you have to ship your bike, make sure it is properly padded and protected to avoid damage. Ask your dealer about supplies used to ship a new bike, such as a fork block.

# CHAPTER 2: MAINTENANCE

---

## Maintenance schedule

This maintenance schedule is based on normal usage. If you ride your bike more than average, or in rain, snow, or off-road conditions, service your bicycle more often than the schedule suggests. If any part appears to be malfunctioning, inspect and service it immediately, or consult your dealer. If a part is damaged, replace it before riding the bicycle again.

After initial break-in, new bikes should be checked for stretched cables and other normal conditions. Approximately two months after purchasing your new bike, have your dealer thoroughly inspect the bicycle.

All bikes should be thoroughly serviced once a year, even if they have not been ridden much.

### Every ride

Check the wheels .....	4
Check the tire inflation .....	5
Check the brakes .....	5
Check the handlebar and stem ..	6
Check the seat and seatpost .....	6
Check the suspension adjust- ments .....	7
Check the lights and reflectors ..	7
Check frame, fork, and components .....	7

### Weekly

Wipe off your bicycle with a damp cloth .....	14
Check for loose spokes .....	29
Lubricate suspension forks .....	34
Check suspension fork bolts ...	31
Check rear suspension bolts ...	18

### Monthly

Check the attachment of the handlebar and stem .....	17
Check the attachment of the seat and seatpost .....	14
Check the chain .....	21
Check the chainguard (accesso- ries) .....	31
Inspect cables for wear .....	22
Check the operation of shifters ..	22
Inspect derailleurs .....	22
Lubricate derailleurs .....	34
Check the internal shift system ..	24
Check headset bearing adjust- ment .....	21
Check brake pads .....	27
Check brake bolts .....	27
Check chain tension .....	6
Inspect Trekking accessory bolts .....	31
Check wheel bearing adjustment .....	29
Check rims for wear .....	29

### Every 3 Months

Clean and polish finish .....	13
Check the crankset and bottom bracket .....	21
Lubricate brake levers .....	34

### Every year

Lubricate handlebar stem .....	33
Lubricate seatpost .....	33
Re-grease pedal threads and bearings .....	21
Re-grease bottom bracket bearings .....	33
Re-grease wheel bearings .....	34
Re-grease headset bearings ...	34
Lubricate wheel quick-releases ..	34
Re-grease suspension forks ...	34

## **Recommended tools for proper bicycle maintenance**

Torque wrench with lb•in or N•m gradations

2, 4, 5, 6, 8 mm allen wrenches

9, 10, 15 mm open-end wrenches

15 mm box end wrench

Socket wrench, 14, 15, and 19 mm socket

T25 Torx wrench

No. 1 phillips head screwdriver

Bicycle tube patch kit, tire pump with gauge, and tire levers

Special high pressure air pump for rear shock or suspension fork

Note: Not all bikes require all these tools

# CHAPTER 3: ADJUSTMENT

This chapter lists instructions for adjustment of the parts of a bicycle. After any repair, inspect the bike as explained in Chapter 1.

## ⚠ WARNING

**A bicycle that malfunctions can cause you to lose control and fall. Inspect the entire bicycle thoroughly before every ride, and do not ride it until any problem has been corrected.**

### A Word About Torque Specifications

Torque is a measurement of the tightness of a threaded fastener such as a screw or bolt, determined by using a torque wrench. The torque specifications should be used to make sure you do not over-tighten the fasteners. Applying more than the recommended torque to a fastener does not provide extra holding power, and may actually lead to damage or failure of a part.

Always perform the simple function tests listed in this chapter to make sure a part is properly tightened, whether or not the part was tightened with a torque wrench. If a part fails inspection at the recommended torque, take the bike to your dealer.

## ⚠ WARNING

**An improperly adjusted or tightened handlebar, stem, or bar-ends can cause you to lose control and fall. Make sure the stem, handlebar, and bar-ends are positioned and tightened properly before riding the bike.**

## Handlebar

### To adjust the angle of the handlebar

1. Loosen the handlebar clamp bolt(s) on the stem (Figures 11-12) just enough that the handlebar can be rotated in the stem.
2. Position the handlebar to the desired angle, making sure it is centered in the stem.
3. Tighten the handlebar clamp bolt(s) according to stem type:
  - Welded stems- 100-120 lb•in (11.3-13.6 N•m).
  - Forged stems- 150-180 lb•in (17-20.3 N•m)

## Stem

There are two types of stems:

- Direct-connect (Figure 11)
- Quill-type (Figure 12)

Adjusting the handlebar height on a direct-connect stem affects the headset bearing adjustment. This procedure requires special tools and training so this should only be done by your dealer.



Figure 11- Direct-connect stem  
A- Handlebar clamp bolts  
B- Steerer clamp bolts

### To align a direct-connect stem

1. Loosen the steerer clamp bolts two to three turns.
2. Align the stem with the front wheel.
3. Tighten the steerer clamp bolts to 100-120 lb•in (11.3-13.6 N•m).

## To align or adjust a quill-type stem

To adjust the height of the adjustable-rise stem in Figure 12, first change the stem angle, which gives access to the stem expander bolt.

1. Loosen the stem expander bolt two to three turns.
2. Tap the top of the stem expander bolt with a wood or plastic-faced mallet to loosen the stem wedge.
3. Adjust the handlebar to the desired height, but with the minimum insertion line inside the frame (Figure 13). A minimum of  $2\frac{3}{4}$ " (70 mm) of the stem quill must always remain in the frame.
4. Tighten to 120 lb•in (13.6 N•m).



Figure 12- Adjustable-rise quill stem  
A- Handlebar clamp bolts  
B- Stem expander bolt  
C- Angle adjusting bolt




Figure 13- Minimum insertion mark on quill stem  
A- This line must be inside the bike frame

## To change the angle of an adjustable-rise stem

1. Loosen the angle adjustment bolt (Figure 12) until the stem angle can be changed.
2. Position the stem to the desired angle.
3. Tighten the angle adjusting bolt to 150-170 lb•in (17-20.3 N•m).

## To change the angle of a Bontrager adjustable-rise stem

1. Slide the locking button (Figure 14) forward and lift the quick-release lever.
2. Position the stem and handlebar to the desired angle.
3. Close the quick-release lever.




Figure 14- Bontrager adjustable-rise stem  
A- Tension adjusting screw  
B- Quick-release lever  
C- Locking button

Make sure the lever is completely closed and the locking button has returned to its locked position.

## To adjust the clamping force of the quick-release lever of the Bontrager adjustable-rise stem

1. Open the quick-release lever.
2. Turn the tension adjusting screw (Figure 14).
3. Check that at about halfway through the lever throw there is some resistance.

If the clamp force is too high or too low, re-adjust the screw.

## **⚠ WARNING**

Never ride your bicycle with a quill stem raised above the minimum insertion mark. A quill stem that is positioned too high can damage the bike and can cause you to lose control and fall. Make sure the minimum insertion mark (Figure 13) is inside the frame.

## Bar-ends

Bar-ends (Figure 15) are designed for climbing only. Ensure the bar-ends face forward and away from you, but at an angle not less than 15° from parallel to the ground.



Figure 15- Bar-ends  
A- Bar-end clamp bolt

### To adjust the angle of the bar-ends

1. Loosen the bar-end clamp bolt(s) until they can be rotated on the handlebar.
2. Position the bar-ends to the desired angle.
3. Tighten the bar-end clamp bolt to 85-125 lb•in (9.6-14.1 N•m)

## Saddle

The correct adjustment of the seat angle is largely a matter of personal preference. With proper adjustment, the right bike seat will be reasonably comfortable even for long rides.

To select the saddle angle, first try riding with the top of the seat parallel to the ground. For bikes with rear suspension, try tilting the seat nose down slightly so that compression of the rear shock under your body weight (sag) results in a level seat.

The seat may also be moved forward or backward along the seatpost to increase comfort as well as adjust the distance to the handlebar.

## ⚠ WARNING

Extended riding with a poorly adjusted saddle or one that does not properly support your pelvic area can cause injury to your nerves and blood vessels. If your saddle causes pain or numbness, re-adjust the saddle position. If after adjustment your saddle still causes pain or numbness, consult your dealer about further positioning or replacing the saddle with one that better fits you.

Never engage the seatpost binder with the seatpost out of the frame.

### To adjust the angle of the seat

1. Loosen the seat fixing bolt (Figure 16) just far enough so the seat can be tilted fore and aft.

*Some seatposts use two bolts, where angle adjustment is done by loosening one bolt and tightening the other bolt.*

2. Place a straight edge, such as a bubble level or ruler, across the top of the seat to better see the angle.




Figure 16- Seatpost parts  
A- Seat fixing bolts  
B- Seatpost  
C- Seatpost binder bolt




Figure 17- Bontrager seatpost  
A- Seat fixing bolt

- Adjust the seat and re-tighten the seat fixing bolt according to the type of seatpost:
  - Double bolts using a 5 mm allen wrench- 80-125 lb•in (9.6-14.1 N•m).
  - Single bolt using a 13 or 14 mm open-end wrench- 180-220 lb•in (20.3-24.9 N•m).
  - Single bolt using a 6 mm allen wrench- 150-250 lb•in (17-28.3 N•m).
  - Double bolts using a 4 mm allen wrench- 45-60 lb•in (5-6.8 N•m).

### To adjust the seat height of a bicycle

- Sit on the seat in riding position without shoes, while someone holds the bicycle up.
- Position the crank arms so they are parallel to the seat tube.



Figure 18- Leg extension with proper seat height

- Loosen the seatpost binder bolt, or quick-release.
- Extend the seatpost until, with your heel resting on the bottom pedal, your extended leg is straight (Figure 18).

*When wearing your shoes there should be a slight bend in your knee in a proper riding position; with the ball of your foot on the pedal.*

- Make sure the minimum insertion mark on the seatpost (Figure 19) is not visible above the bike frame. A minimum of 2 1/2" (64 mm) of seatpost must remain in the frame.
- Close the seatpost quick-release, or tighten the bolt to 85-125 lb•in (9.6-14.1 N•m)




Figure 19- Minimum insertion mark on seatpost  
A- This line must be inside the bike frame

**⚠ WARNING**

**A seatpost that is positioned too high can damage the bike and can cause you to lose control and fall. Make sure the minimum insertion mark (Figure 19) is inside the frame.**

### To adjust the seat position of a tricycle

- Loosen and remove the clamp bolts (Figure 20).
- Move the seat mast to the desired position.
- Install and tighten the seat mast clamp bolts to 85-125 lb•in (9.6-14.1 N•m).




Figure 20- Tricycle seat mast  
A- Seat mast  
B- Clamp bolts

## Headset

### To check if the headset is loose or tight

1. Apply the front brake firmly while you rock the bicycle forward and backward.
2. With the front wheel off the ground, slowly rotate the fork and handlebar to the right and left.

If the headset bearings rock in the frame or do not turn smoothly, do not ride the bicycle; take the bike to your dealer for service.

Adjustment of headset bearings requires special tools and training. These services should only be performed by your dealer.

## Crankset

### To check the bottom bracket bearing adjustment

1. Lift the chain from the chainrings.
2. Rotate the crank so that one of the arms is parallel to the seat tube.
3. Put one hand on the crank arm and one hand on the seat tube, and attempt to move the crank arm laterally toward and away from the seat tube.
4. Spin the cranks.

If the crank feels or sounds loose, or if the motion stops abruptly or you hear a grinding noise coming from the bearings, the bearings need to be adjusted or re-greased by your dealer.

## Crank arms

Some bicycles offer adjustable crankarm length. To change the crank length, remove the pedals and install them into the second set of holes. Tighten by following the instructions for Pedals.

## Pedals

To adjust the release force on clipless pedals, refer to the information on the CD supplied with your bicycle, or consult your dealer.

The left pedal is left-hand threaded, while the right pedal is right-hand (normal) threaded. Tighten pedals into the crankarms to 350-380 lb•in (40.2-42.9 N•m).

Adjustment of pedal bearings requires special tools and training. These services should only be performed by your dealer.

## Bottom bracket

Adjustment of bottom bracket bearings requires special tools and training. These services should only be performed by your dealer.

## Chain

### To adjust the chain tension on a single speed bike

1. In small increments, loosen the rear wheel axle nuts on alternate sides of the wheel.

*If you fully loosen one side before loosening the other, you may cause the bearings to come out of adjustment.*

- Slide the wheel to re-tension the chain, and center the wheel in the frame.

*Some models have a chain tensioning device which helps position the wheel.*

- Complete the wheel installation.

## Cables

Check the cables for kinks, rust, broken strands, or frayed ends. Also check the housing for loose wire strands, bent ends, cuts, and wear. If you suspect a problem with a cable, do not ride the bicycle; follow the instructions to replace a cable (page 34), or have your dealer service the bicycle.

## Shifters

The position of the shifters can be adjusted on the handlebar. Follow the instructions for adjusting the lever position on pages 25-26.

## Front derailleur

### To adjust the small chainring position

- Shift the chain onto the smallest front chainring and the largest rear cog.
- Loosen the front derailleur cable clamp bolt (Figure 21) until the cable is free.




Figure 21- Front derailleur  
A- Cable  
B- Adjusting screws  
C- Cable clamp bolt

- Turn the low gear adjusting screw (marked "L") until the inner chain guide of the derailleur is approximately 0.5 mm from the chain.
- Pull on the cable end, and down-shift the left shift lever several times so that it is in the small-chainring position.
- On the shifter or down tube, turn the shift cable adjusting barrel to its most clockwise position.
- Insert the cable in the groove found next to the derailleur cable clamp bolt, pull the cable taut, and tighten the bolt:
  - Front derailleur cable clamp bolt- 44-60 lb•in (5.0-6.8 N•m).

### To adjust the big chainring position

- Shift the rear derailleur to the smallest rear cog.
- Turn the high-gear adjusting screw (marked "H") counter-clockwise until it cannot interfere with the motion of the derailleur.
- Hand-turn the cranks, and use the shifter to carefully shift the chain onto the outside chainring.
- Position the outer chain guide of the front derailleur approximately 0.5 mm from the chain.
- Re-tighten the high gear adjusting screw until it meets resistance.

*If you have turned the screw too far, the front derailleur will move toward the small chainring.*

- Go through the various gear combinations. Make sure the chain does not fall off when you shift, and the derailleur cage does not rub on any part of the crankset.

### To adjust the middle gear position, with three chainrings

- Shift the chain onto the largest front chainring and the smallest rear cog.
- Rotate the cable tension barrel-adjuster (on the downtube, or on the lever) counter-clockwise, increasing cable tension to align the inner derailleur cage until it just touches the chain.
- Go through the various gear combinations to ensure the chain smoothly lines up with all the chainrings.

*Note: some front shifters have a 'tab' feature: slightly downshift the lever and the derailleur will move in slightly, no longer touching the chain.*

## Rear derailleur

### To adjust the small cog position

- Shift the chain onto the smallest rear cog and the largest front chainring.
- Loosen the cable clamp bolt (Figure 22) until the cable is free.




Figure 22- Rear derailleur  
 A- Adjusting screws  
 B- Barrel adjuster  
 C- Cable clamp bolt  
 D- Cable

- Stand behind the bicycle to see that the smallest rear cog, the chain, and the two derailleur pulleys are in line.
- If they are not aligned, turn the high gear adjusting screw (usually marked "H",) until this line is established.
- While pulling on the cable, up-shift until the shifter is in the small cog position.
- On the shifter or down tube, turn the adjusting barrel all the way clockwise. Turn the adjusting barrel on the rear derailleur all the way clockwise, and then one turn counter-clockwise.
- Insert the cable into the clamp bolt groove on the rear derailleur, pull the shift cable taut, and tighten the cable clamp bolt to 44-60 lb•in (5.0-6.8 N•m).

### To adjust the large cog position

- Turn the low gear adjusting screw on the rear derailleur (usually marked "L") far enough counter-clockwise that it will not restrict the movement of the derailleur.
- Carefully shift the chain onto the smallest front chainring and the largest rear cog.
 

*Do not over-shift the rear derailleur, or the chain may wedge between the large cog and the spokes.*
- Position the rear derailleur pulleys in line with the largest cog.
- Turn the low gear adjusting screw clockwise until it meets resistance.

*If you have turned it too far, the derailleur will move toward the outside of the bicycle.*

5. Go through the various gear combinations. Make sure the chain does not fall off when you shift.

### To align the indexing system

1. Shift the chain onto the largest front chainring and the smallest rear cog.
2. Shift one click with the rear shifter.
3. Check if the chain moves smoothly to the next gear.
  - If the chain makes excessive noise or does not shift, turn the barrel-adjuster counter-clockwise in small increments and check again for a smooth shift.
  - If instead, the chain moves to the third smallest cog, turn the barrel adjuster clockwise until the derailleur pulleys align with the second smallest cog.
4. Go through the gear combinations to ensure the chain smoothly lines up with all the rear cogs.

If the derailleur cannot be adjusted in this manner, the derailleur hanger may be out of alignment; take the bike to your dealer for service.

## Nexus 4, 7, or 8 speed systems

### To adjust the rear shifting

1. Rotate the shifter to the 4th gear position.
2. Align the indicator on the rear hub pulley (Figure 23) with the cog joint bracket.
3. If the red lines do not line up, adjust the gear cable tension by rotating the barrel adjuster until this alignment is achieved.
4. Shift to 1st gear, then back to 4th, and re-check the adjustment.




Figure 23- Pulley and cog joint bracket  
A- Pulley  
B- Cog joint bracket  
C- Cable clamp bolt

## 3 speed systems

### To adjust the rear shifting

1. Rotate the shifter to the 2nd gear position.
2. Align the indicator on the bell crank window with the line on the push rod (Figure 24).




Figure 24- Three-speed bell crank  
A- Bell crank window

- If the indicators do not line up, adjust the gear cable tension by rotating the barrel adjuster until this alignment is achieved.
- Shift to 1st gear, then back to 2nd, and re-check the adjustment.

## Brake levers

The brake system allows you to slow or stop your bike, a function critical to your safety.

The brake system is difficult to adjust properly without the proper tools and training.

It is strongly recommended that adjustment of a brake be done by your dealer. If you need more specific information regarding your brake system, contact your dealer.




Figure 25- Lever clamp bolt, road lever  
A- Lever clamp bolt

### To adjust the position of a lever

- Locate the lever clamp bolt (Figures 25-27).
- Loosen the clamp bolt 2-3 turns.
- Position the lever.
- Tighten the clamp bolt:
  - Regular brake levers- 53-69 lb•in (6.0-7.8 N•m).
  - On mid-bar levers (Figure 27)- 20-30 lb•in (2.3-3.3 N•m).




Figure 26- Lever clamp bolt, mountain lever  
A- Lever clamp bolt  
B- Reach adjustment screw  
C- Cable  
D- Barrel adjuster




Figure 27- Mid-bar brake lever  
A- Lever clamp bolt

- Hayes hydraulic levers- 25-35 lb•in (2.8-4 N•m)

### **To adjust the reach to the brake lever (cable type)**

With some brake levers, you can change the reach, the distance from the handlebar to the lever.

1. Locate the reach adjustment screw (Figure 26) and turn.
 

*To decrease the reach, turn the screw in (clockwise). To increase the reach, turn the screw out (counter-clockwise).*
2. If needed after adjusting the reach, re-adjust the brake pad clearance.

### **To adjust the reach to the brake lever (Hayes hydraulic type)**

1. Locate the reach adjustment screw between the lever and the handlebar, near the lever pivot.
2. To decrease the reach, turn the screw in (clockwise). To increase the reach, turn the screw out (counter-clockwise).

### **To change which lever controls the front brake (cable type)**

*See the Brakes section for brake adjustment procedures.*

1. Open the brake.
2. For a road bike, disconnect the brake cable and completely remove it from the lever.
  - For a mountain bike, just remove the leaded end of the cable from the lever.
3. Install the cables into the opposite levers.
4. Close the brakes.

5. Inspect the brakes as explained in Chapter 1, and re-adjust as necessary.

### **To change which lever controls the front brake (Hayes hydraulic type)**

*Changing the levers with Shimano hydraulic brakes requires special tools and training so should only be done by your dealer.*

1. Loosen and remove both lever clamp bolts.
2. Remove the levers and re-position according to your preference.
3. Re-install the clamp bolts and tighten to 25-35 lb•in (2.8-4 N•m).

## Brakes

Once a month, inspect brake pads for wear. If the grooves in the braking surface are less than 2 mm deep, or 1 mm deep for direct-pull brakes, replace the pads. Replace disc brake pads that are thinner than 1.0 mm.

### To adjust brake pad clearance to the rim

1. Turn the barrel adjuster. To increase the pad clearance, turn the barrel adjuster in (clockwise). To reduce the pad clearance, turn the barrel adjuster out (counter-clockwise).

*For most direct-pull (Figure 28), or cantilever (Figure 30) systems the barrel adjuster is on the lever. For most road caliper systems (Figure 29) the barrel adjuster is on the brake itself.*




Figure 28- Direct pull brake  
A- Cable clamp bolt  
B- No contact  
C- Pad fixing bolt  
D- Centering screw  
E- Arm fixing bolt




Figure 29- Caliper brake  
A- Barrel adjuster  
B- Centering screw  
C- Pad fixing bolt  
D- Brake release lever




Figure 30- Cantilever brake  
A- Linkwire  
B- Pad fixing bolt  
C- Arm fixing bolt  
D- Centering screw

2. If the brake pads cannot be adjusted properly, loosen the cable clamp bolt and re-attach the cable.

### To center a V-type, cantilever, or road brake

1. Rotate the centering screw. Turn in small increments and check for centering.
2. If the brake has two centering screws, adjust the overall spring tension while centering the brake.

### To adjust the alignment of the brake pads on a rim brake

1. Loosen the brake pad fixing bolt.
2. Align the pads as shown on page 5, and tighten the pad fixing bolts:
  - Road caliper- 40-60 lb•in (4.5-6.8 N•m)
  - Direct-pull or cantilever- 70-80 lb•in (7.9-9 N•m)
3. After adjusting the brakes, test them by applying force to the levers. Ensure the cable does not slip, the pads close toward the rim at right angles, and the pads do not contact the tire.

### To align a hydraulic disc brake

1. Loosen the brake mounting bolts.
2. Apply the lever fully, and gradually tighten the bolts to 100-110 lb•in (11.3-12.4 N•m).

## To align a cable-actuated disc brake

There are several parts to this procedure:

### • To adjust right brake pad clearance to the disc

1. Turn the fixed pad adjuster (Figure 31).
2. If the pads cannot be adjusted properly in this manner, follow the instructions *To adjust left brake pad clearance to the disc*, and re-set the right pad.




Figure 31- Disc brake  
A- Mounting bolts  
B- Fixed pad adjuster  
C- Cable clamp bolt

### • To adjust left brake pad clearance to the disc

1. Turn the cable barrel adjuster. To increase the pad clearance, turn the barrel adjuster in (clockwise). To reduce the pad clearance, turn the barrel adjuster out (counter-clockwise).
  2. If the pads cannot be adjusted properly in this manner, loosen the cable clamp bolt and re-attach the cable. Tighten the cable clamp bolt to 50-70 lb•in (5.7-7.9 N•m).
  3. After adjustment, turn the locking nut clockwise to help prevent rotation of the barrel adjuster.
- **To align the brake with the disc**
1. Loosen the brake mounting

2. Slide a business card, or similar thin object, between the right brake pad and the disc.
3. Apply the lever fully, and gradually tighten the bolts to 100-110 lb•in (11.3-12.4 N•m).

## To remove disc brake pads

1. Remove the wheel.
2. With your fingers or thin-tipped pliers, grasp the installation tang of the brake pad and pull out.

## To open the brake for wheel removal

- **For most road calipers**, lift the brake release lever to the open **UP** position. To close, simply turn the lever to the **Down** position.
- **For Campagnolo levers**, there is a release button at the top of the lever. Slightly depress the brake lever, and push the button until it is flush with the lever body. Release the lever and the brake will open. To close, reverse the instructions.
- **For cantilever brakes**, release the linkwire. With one hand, squeeze the brake pads firmly against the rim. With the other hand, pull the leaded end of the linkwire from the retaining fork on the brake arm. Release the brake pads, and the brake will open. To close the brake, reverse the instructions.

- **For direct-pull type brakes,** disconnect the pipe from the link arm. With one hand, squeeze the pads firmly against the rim. With the other hand, pull the pipe back from the link arm, and lift the pipe. Once disconnected, let go of the brake pads and the brake will open.

To close the brake, reverse the instructions.

- **For internal or drum brakes,** to remove the rear wheel, first disconnect the shift and brake cables.

-To disconnect the brake cable, press the cable carrier arm forward, and the cable clamp bolt rearward, so the bolt aligns with the larger diameter hole in the carrier. Pull the cable clamp bolt outward to disengage it from the carrier. Slide the brake cable stop forward to remove it from the brake arm. Undo brake strap bolt.

-To disconnect the shift cable, put the shifter in 1st gear. Pull the cable housing out of the shift cable housing stop. Rotate the shift cable fixing bolt until the washer flats align with the slit in the cog joint bracket. Remove the cable.

## Wheels

Inspect tires for wear and damage. Make sure rims are clean, and check for wear; if the small indentations on the braking surface disappear, replace the rim.

### **WARNING**

**Brake pads remove material when the brake is applied. If too much material is removed, the rim may become weak and fail suddenly, causing a loss of control. Regularly inspect your rims for wear and replace them when they are worn.**

Make sure there are no loose, damaged, or broken spokes. Check that hub bearings are properly adjusted. Make sure a rim strip is in place and all spoke holes are completely covered.

### To adjust and install a quick-release wheel

1. Move the quick-release lever to the **OPEN** position (Figure 32) and set the wheel so it firmly touches the inside of the fork ends.
2. With the lever about halfway between the **OPEN** and **CLOSE** positions, tighten the adjusting nut (Figure 33) until finger-tight.




Figure 32- Lever positions




Figure 33- Tighten nut  
A- Adjusting nut

- Place the lever in the palm of your hand and throw the lever as shown in Figure 34 to the **CLOSE** position (Figures 36-37).




Figure 34- Proper lever throw

At the half-closed position of the lever, there should be some resistance.

- Do not tighten the quick-release wheel retention mechanism by turning the lever like a wing nut (Figure 35); it will not result in sufficient force to hold the wheel in place.




Figure 35- Do not turn lever



Figure 36- Front lever position

- If the lever is moved to the **CLOSE** position with little or no resistance, clamping strength is insufficient. Return the lever to the **OPEN** position, tighten the adjusting nut further, close the lever, and again test for resistance. For further information on correct adjustment of the quick-release tension, read Figure 38.



Figure 37- Rear lever position

If it requires more than 45 pounds (200 Newton) force to completely close the quick-release lever, open the lever and slightly loosen the quick-release adjusting nut. If it requires less than 12 pounds (53.4 Newton) force to begin to open the lever from the fully closed position, open the lever and slightly tighten the quick-release adjusting nut.

Repeat the adjustment if necessary.

Figure 38- Actual measurements

- Orient the quick-release levers so they do not interfere with any other bicycle part or accessory part (such as rack or fenders), and so obstacles in the path of the bicycle cannot snag the levers.

- Test that you have properly adjusted and closed the quick-release. If the quick-release fails any test, either repeat these adjustment procedures, including these tests, or take your bicycle to your dealer for service.

- Test for proper quick-release adjustment:

- Pick up the bike, and sharply hit the top of the tire (Figure 39). The wheel must not come off, be loose, or move from side to side.
- Make sure the quick-release lever cannot be rotated parallel to the wheel (Figure 40).



Figure 39- Test for looseness



Figure 40- Test for rotation

- When the quick-release is properly tightened and clamped by the lever in the closed position, the clamping force is adequate to cause metal-into-metal engagement (embossing) of the dropout surfaces.
- See Figure 38.

### To install an axle-nut wheel

Some wheels are attached by nuts threaded onto the axle. The front wheel may require a toothed washer to be placed between the nut and fork tip. Some bicycles also have pegs, tubular axle extension.

1. Tighten the axle nuts:
  - Tighten a regular front wheel to 180-240 lb•in (20.3-27.1 N•m).
  - Tighten a regular rear wheel to 240-300 lb•in (27.1-33.9 N•m).
2. Test to ensure that you have properly tightened the axle-nuts.
  - Pick up the bike, and sharply hit the top of the tire (Figure 39). The wheel must not come off, be loose, or move from side to side.

If the wheel attachment fails the test, repeat these procedures, including the tests, or take your bicycle to your dealer for service.

### To install a thru-axle wheel

1. Open the quick-release or loosen the clamp bolts on both fork ends.
2. With the wheel in place, slide the axle into the fork tips.

3. Close the quick-releases, or tighten the clamp bolts to 45-55 lb•in (5.1-6.2 N•m).
4. Test to ensure that you have properly attached the thru-axle.
  - Pick up the bike, and sharply hit the top of the tire (Figure 39). The wheel must not come off, be loose, or move from side to side.

If the wheel attachment fails the test, repeat these procedures, including the tests, or take the bicycle to your dealer for service.

## Suspension components

Changing your suspension settings affects handling and braking characteristics. After making a change, carefully test the bike in a low traffic area until you are familiar with its performance.

Sag is the compression of a shock that occurs when the rider sits on the bike in a normal position. For an all-round ride, set the forks at about 15% sag, and a rear shock at about 25% sag. Experiment with the adjustment in small increments to find your preference. If the suspension is fully compressed, its movement will stop abruptly and could cause you to lose control. See the CD or web site for more specific adjustment and maintenance information, or consult your dealer.

## Accessories

Once a month, check any accessories to make sure they are properly attached. If any part seems loose or misaligned, either tighten the part or take the bike to your dealer for service.

## To adjust training wheels

*See other sections of this manual as needed.*

1. Place the bike on a flat, smooth surface, with the tires properly inflated.
2. Loosen the rear axle nuts. Follow the procedures in the Wheels section.
3. Stand the bike up very straight, and set a gap of about 1/4" (6 mm) between the training wheels and the ground on both sides of the bike. Make sure the gap is the same on both sides.
4. Adjust the chain tension and re-tighten the axle nuts.

## To install a light bulb

1. Locate the lens set-screw on the back of either the taillight or head light.
2. Remove the screw.
3. Rotate the lens 1/4 turn clockwise and lift the lens assembly off the bulb mount.
4. Unscrew the bulb.

*Be careful not to crush the glass of the bulb.*

*Do not dislodge the wire in the base of the bulb mount.*

5. Screw a new bulb in until finger tight.
6. Place the lens on the bulb mount, rotate the lens 1/4 turn counter-clockwise.
7. Install the lens set-screw.

Check that the new bulb works. If it does not, check the wiring for correct placement, and verify that the new bulb is not damaged.

## Folding bike

Some models of Trek bikes have a large hinge in the middle to fold the bike by following these steps:

### To lower the saddle

1. Open the seatpost quick-release and lower the saddle.
2. Close the quick-release to hold the seatpost in position.

### To fold the pedals

1. Push the end of the pedal directly inward, toward the crankset.
2. Fold the pedal over.
3. Repeat for the other pedal.

### To fold the handlebar stem

1. Rotate the lever lock away from the lower quick-release.
2. Hold the handlebar with the cables out of the way to prevent pinching, and open the lower quick-release.
3. Fold the handlebar assembly to its down position.

### To fold the main frame

1. Open the latch lock.
2. Pull outwards, away from the frame, on the end of the frame latch until the latch opens.
3. While avoiding pinching yourself or cables, fold the bike in half.

To unfold the frame, reverse the steps of the folding procedure.

## WARNING

**Riding a folding bike with movement at the lower stem quick-release or main frame hinge could cause you to lose control and fall. If the folding frame moves at the stem or frame hinge, take the bike to your dealer for service.**

# CHAPTER 4: LUBRICATION

---

This section explains the parts that require lubrication, their frequency, and brief instructions. See your dealer for recommended lubrications. If you need more detailed information, see other sections of this manual as needed, or consult your dealer.

Re-greasing bearings requires special tools and training, so this should only be done by your dealer. Some bearings are permanently sealed and do not require yearly re-greasing

## Stem

Once a year lubricate the stem.

*Note: Lubricating a direct-connect stem requires adjustment of the headset bearings, so should only be done by your dealer.*

1. Remove the stem from the frame.
2. Clean the stem and wipe any old grease.
3. Apply a thin layer of grease to the section of the quill that will be inserted into the frame, including the stem wedge.
4. Install the stem.

## Seatpost

Once a year, lubricate the seatpost. Choose the method for your frame and seatpost material:

### Aluminum seatpost in a metal frame

1. Loosen the seatpost binder bolt, or open the quick-release, and remove the seatpost from the frame.
2. Wipe any old grease off the seatpost, and clean if necessary.

3. Apply a thin layer of grease to the section of the seatpost that will be inside the frame.
4. Insert the seatpost into the frame.
5. Adjust the seat to the proper height, align it, and tighten the seatpost binder bolt.

### Carbon fiber seatpost, or carbon fiber frame

1. Loosen the seatpost binder bolt, or open the quick-release, and remove the seatpost from the frame.
2. Wipe the seatpost and inside the seat tube with a soft cloth and clean water.
3. Let the seatpost dry, then insert it into the frame.
4. Adjust the seat to the proper height, align it, and tighten the seatpost binder bolt.

## Bottom bracket

Once a year, have your dealer re-grease the bottom bracket bearings,

## Pedals

Once a year, have your dealer re-grease the pedal bearings.

Once a year re-grease the pedal axles where they thread into the crank arms.

*Note: There are right and left pedals, usually marked with a letter stamped on the end of the pedal axle, or on the wrench flats.*

1. Remove the pedals; turn the right pedal spindle counter-clockwise, but turn the left clockwise.

2. Apply a this layer of grease over all the threads.
3. Install the pedals on the proper side; put the right pedal on the right crank arm and the left pedal on the left crank arm.
4. Tighten the pedals.

## Derailleurs

Every month, lubricate all pivot points on both the front and rear derailleurs, including the derailleur pulleys on the rear derailleur, with chain lube.

## Headset

Once a year, have your dealer re-grease the headset bearings.

## Brakes and brake levers

Every 3 months lubricate your brake lever pivots and brake arm fixing pivots with a light oil.

## Wheels

Once a year, have your dealer re-grease the wheel bearings.

Every year, lubricate wheel quick-releases. Apply several drops of synthetic lube or a similar light oil where the quick-release lever rotates in the quick-release body.

## Suspension forks

Once a month, apply a light oil to the upper fork leg where the lower leg slides on it. Wipe clean.

## Rear suspension

No lubrication is required for the shock or the pivot of your full suspension bike. Avoid all lubricants.

## Control cables

Lubricate cables whenever they are installed.

### To install a cable

*Installing a cable in a cantilever brake requires special tools and training, so should only be done by your dealer.*

1. Note the path of the old cable, loosen the cable anchor bolt, and remove the worn cable.
2. Grease the new cable and reinstall, feeding it along the same path as the old cable, including through the cable anchor bolt.
3. Make sure the leaded cable-end is seated properly in the lever, and the housing is properly seated in the lever.

*If needed when installing a cable in a brake, re-adjust the brake.*

4. Turn the adjusting barrel clockwise so the threads on the adjusting barrel are not exposed.

*For a shift cable, put the shifter in the position with the least cable tension.*

*For a brake, hold the brake closed while you do the next step.*

5. Tighten the cable clamp bolt to 52-69 lb•in. (6-8 N•m).
6. Cut the cable so that no more than 2" (51 mm) extends beyond the anchor bolt.
7. Crimp a metal cap or place a bit of solder on the end of the cable to prevent fraying.
8. Follow the instructions for adjustment.

# FOR MORE INFORMATION

---

If you would like additional information about your bicycle, maintenance, or bicycling in general, there are many resources in your community.

First, talk to your bicycle dealer. They have extensive experience with bicycles and riding in your community. With this background, they can help you with your individual questions and help you find areas to enjoy your new bicycle. In addition, most dealers stock a variety of book about cycling, including extensive repair manuals.

Second, check your public library. Most libraries have extensive offerings of books written by experts in the field about riding, racing, bicycle safety, bicycle maintenance, and more.

Third, go on-line. The best on-line resource for your bike can be found by viewing the CD that accompanies this manual. Place the CD in a computer, and you will find much more information. With internet access, you can link direct from the CD to our company web site. Links to some of the companies that make the parts of your bike are also provided. All of this information and help is just a click away.

# LIMITED WARRANTY

All Trek bikes are sold exclusively through our network of Authorized Dealers who we entrust with professional assembly and service of your bicycle.

Trek Bicycle Corporation warrants each new Trek frame, rigid fork, or original component part of the bicycle against defects in workmanship and materials:

## **For the lifetime of the original owner-**

- The bicycle frame, except the fork and the Session model

## **For five years-**

- Rigid forks
- All Bontrager components and accessories, except consumables such as tires and inner tubes.

## **For three years-**

- The Session model frame

## **For one year-**

- Paint and decals
- All original parts, excluding suspension forks, and rear shock absorbers
- All original parts, excluding Shimano parts, suspension forks, and rear shock absorbers
- All Shimano parts, suspension forks, and rear shock absorbers shall be covered by the stated warranty of the original manufacturer.

## **This warranty does not cover-**

- Normal wear and tear
- Improper assembly
- Improper follow-up maintenance
- Installation of parts or accessories not originally intended for, or compatible with, the bicycle as sold
- Damage or failure due to accident, misuse, abuse, or neglect
- Labor charges for part replacement or changeover

This warranty is void in its entirety by any modification of the frame, fork, or components.

This warranty is expressly limited to the repair or replacement of a defective item and is the sole remedy of the warranty. This warranty extends from the date of purchase, applies only to the original owner, and is not transferable. Trek Bicycle Corporation is not responsible for incidental or consequential damages. Some states do not allow the exclusion of incidental or consequential damages, so the above exclusion may not apply to you.

Claims under this warranty must be made through an authorized Trek dealer. Proof of purchase is required. The subject item must be registered with Trek Bicycle Corporation, either through on-line registration or by the receipt of a warranty registration card by Trek Bicycle Corporation, before a warranty claim may be processed.

Warranty duration and detail may differ by frame type and/or by country.

This warranty gives the consumer specific legal rights, and those rights may vary from place to place. This warranty does not affect the statutory rights of the consumer.

## **Carbon crash replacement policy**

Assessing any damage done to a carbon fiber part requires more experience than is needed to inspect metal parts. If you crash or impact your bike and the force of the impact is absorbed by a carbon part, we strongly encourage you to replace the part, even if there are no indications of damage.

If such a crash or impact occurs, Trek offers a crash replacement program for carbon parts, substantially reducing any replacement cost. To take advantage of this program, contact us using the information listed above and ask for the Warranty department.

# TREK

## Customer Service

920-478-4678

[www.trekbikes.com](http://www.trekbikes.com)

801 West Madison Street

Waterloo, Wisconsin 53594 USA

**EN** An english version of this manual is on the CD. If you do not have access to a computer and would like a printed version, contact us at the address on this page.

**FR** Une version française de ce manuel se trouve sur le CD. Si vous n'avez pas accès à un ordinateur et si vous souhaitez obtenir une version papier, contactez-nous à l'adresse qui figure sur la page.

**DE** Eine deutsche Version dieses Handbuchs finden Sie auf der CD. Wenn Sie keinen Computer zur Verfügung haben und eine Druckversion des Handbuchs wünschen, wenden Sie sich an uns unter der hier angegebenen Adresse.

**ES** Una versión español de este manual se encuentra en el CD. Si no tiene acceso a un ordenador y desea obtener una versión impresa, póngase en contacto con nosotros mediante la dirección indicada en esta página.

**IT** Una versione italiana del presente manuale è riportata sul CD. Se non è possibile accedere a un computer ed è pertanto necessaria una copia cartacea, siete pregati di contattarci ai recapiti sopraelencati.

**NL** Een Nederlandstalige versie van deze handleiding vind je op de cd. Als je geen toegang hebt tot een computer en een gedrukte handleiding wilt ontvangen, kun je schrijven naar het adres op deze pagina.

**DA** En version af denne manual findes på cd'en. Hvis du ikke har adgang til en computer og gerne vil have en trykt version, kan du kontakte os på adressen på denne side.

**PT** Uma versão deste manual encontra-se no CD. Se não tem acesso a um computador e gostava de ter uma versão impressa, contacte-nos na morada nesta página.

**JA** 本マニュアルのバージョンはCDに収録されています。コンピュータへアクセスできず、印刷物をご希望の場合は、このページにある住所までご連絡ください。

**ZL** 本手册的第 版位于 CD。如果您无法访问计算机，并想要打印版本，请通过本页上的地址

© 2006 Trek Bicycle Corporation

All rights reserved.

The Trek Logo is a registered trademark of Trek Bicycle Corporation.

**Part # 278709**